




**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00302480.9

Der Präsident des Europäischen Patentamts:
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE, 12/03/01
LA HAYE, LE

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583

584

585

586

587

588

589

590

591

592

593

594

595

596

597

598

599

600

601

602

603

604

605

606

607

608

609

610

611

612

613

614

615

616

617

618

619

620

621

622

623

624

625

626

627

628

629

630

631

632

633

634

635

636

637

638

639

640

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

673

674

675

676

677

678

679

680

681

682

683

684

685

686

687

688

689

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

711

712

713

714

715

716

717

718

719

720

721

722

723

724

725

726

727

728

729

730

731

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863

864

865

866

867

868

869

870

871

872

873

874

875

876

877

878

879

880

881

882

883

884

885

886

887

888

889

890

891

892

893

894

895

896

897

898

899

900

901

902

903

904

905

906

907

908

909

910

911

912

913

914

915

916

917

918

919

920

921

922

923

924

925

926

927

928

929

930

931

932

933

934

935

936

937

938

939

940

941

942

943

944

945

946

947

948

949

950

951

952

953

954

955

956

957

958

959

960

961

962

963

964

965

966

967

968

969

970

971

972

973

974

975

976

977

978

979

980

981

982

983

984

985

986

987

988

989

990

991

992

993

994

995

996

997

998

999

1000



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.: 00302480.9
Demande n°:

Anmeldetag:
Date of filing: 27/03/00 ✓
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Hewlett-Packard Company, A Delaware Corporation
Palo Alto, CA 94304
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Liquid crystal alignment structure

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:


Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:
G02F1/1337

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR ✓
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

See for original title of the application page 1 of the description.

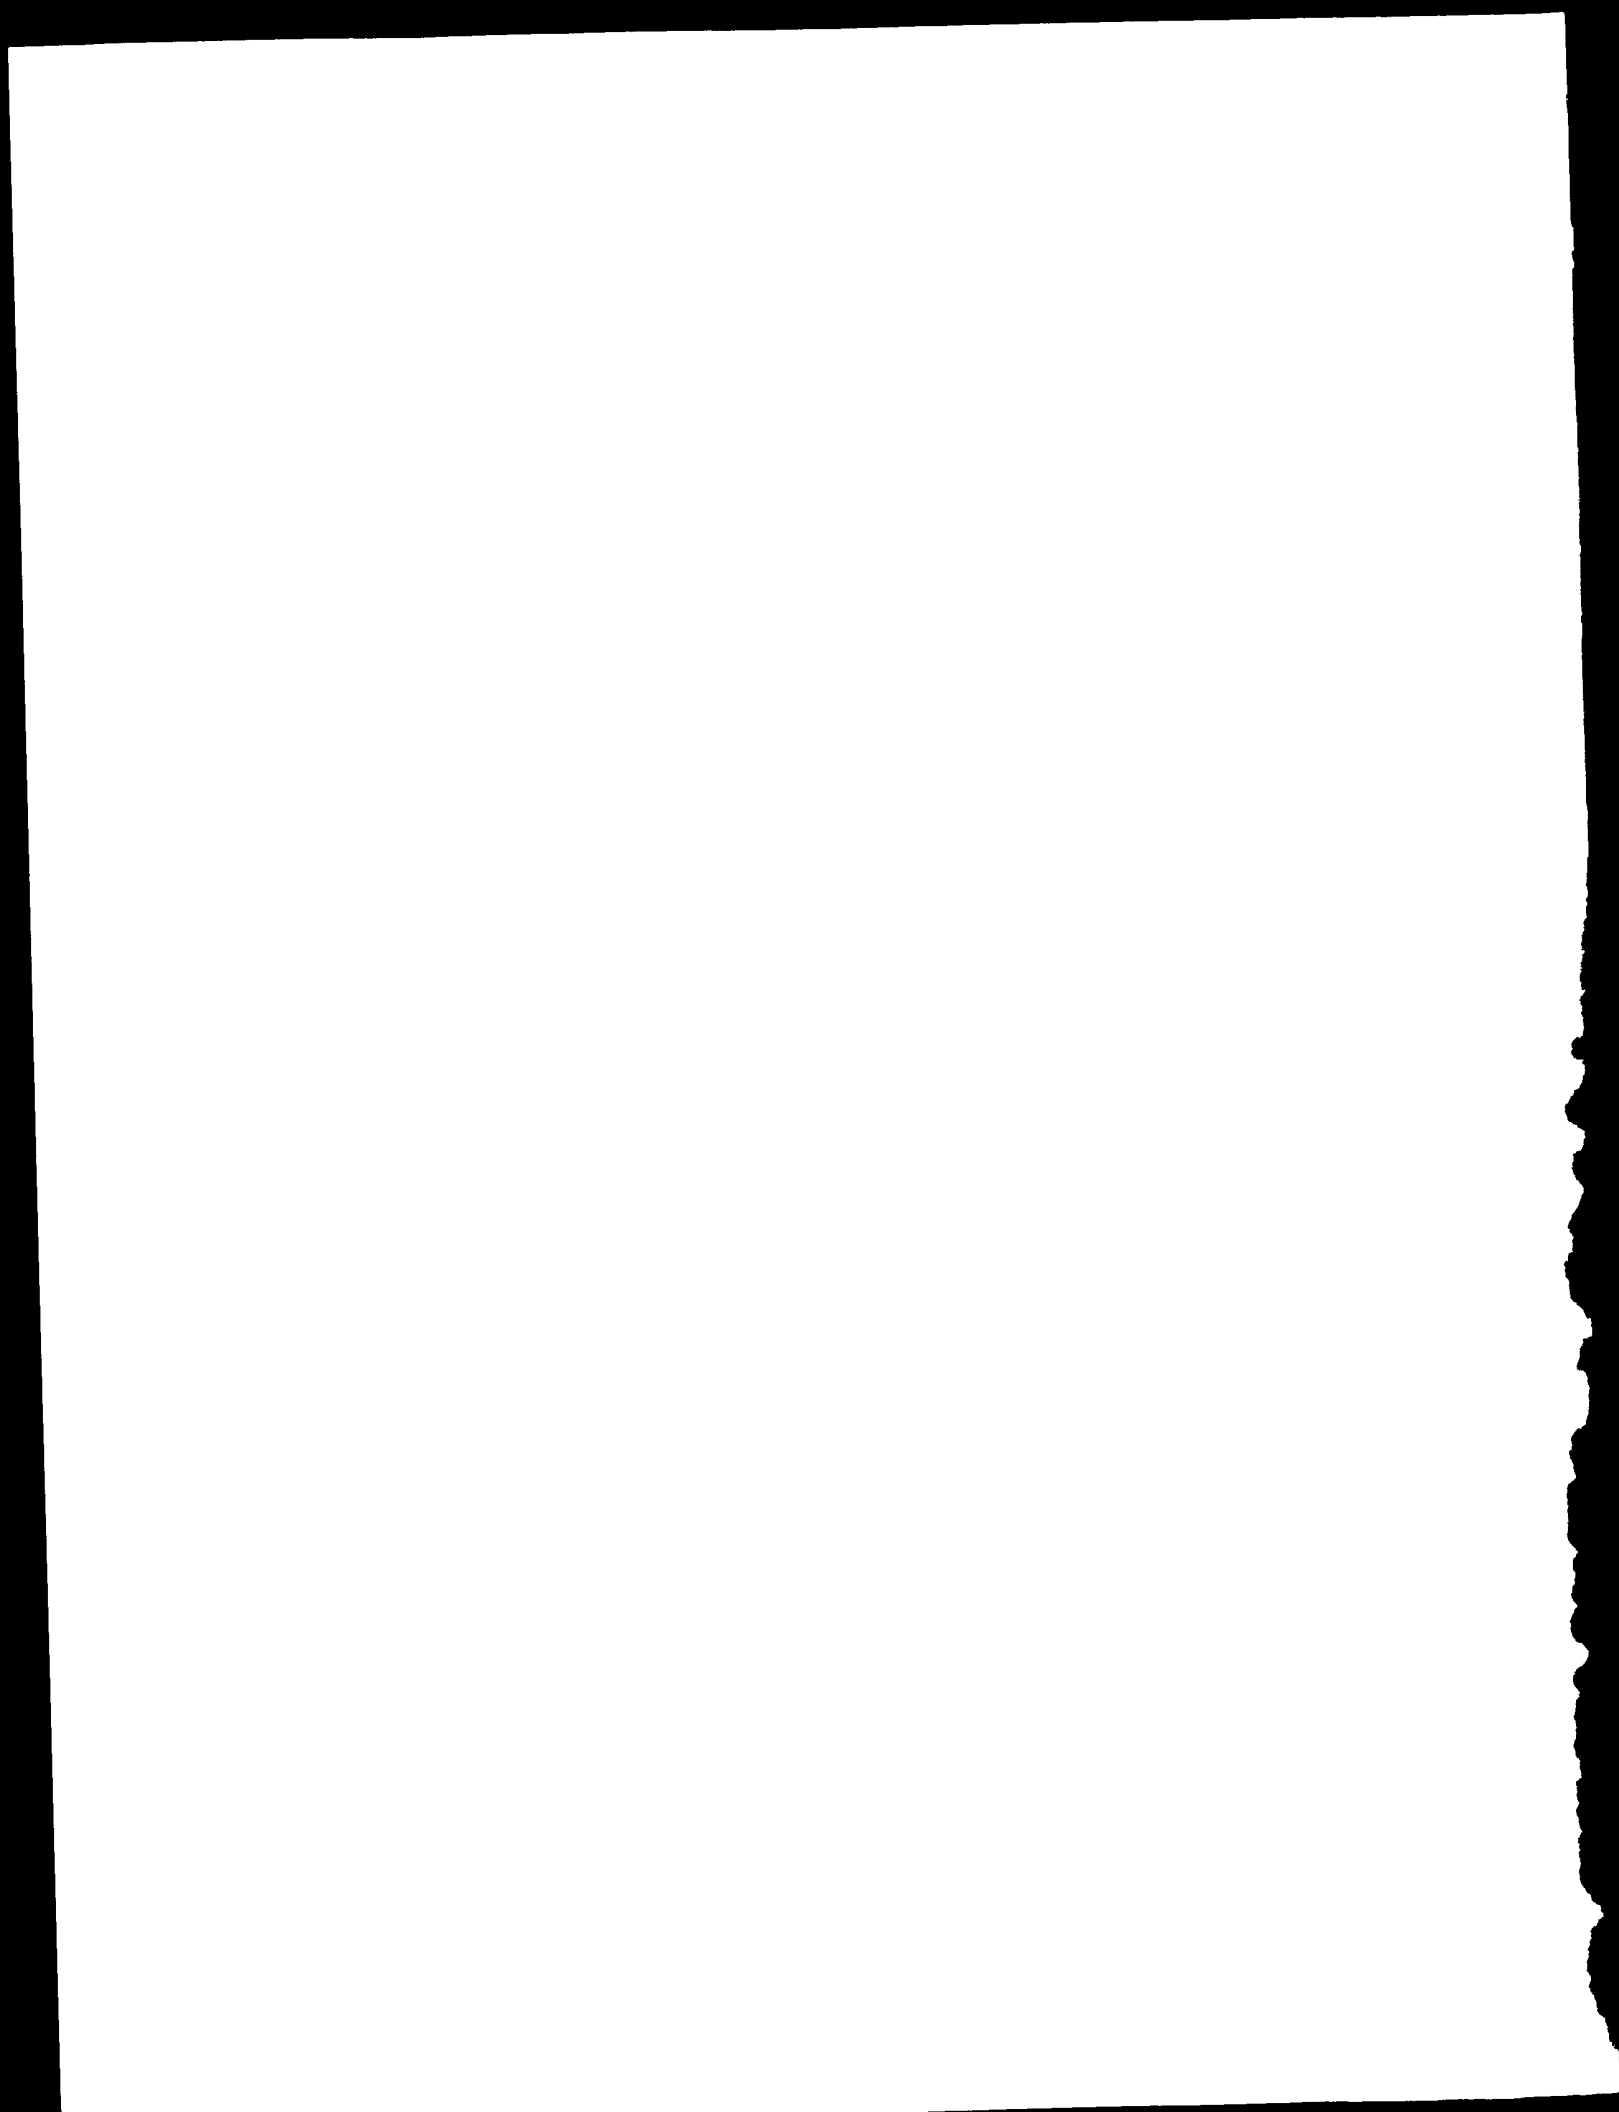

LIQUID CRYSTAL ALIGNMENT - RANDOMNESS

FIELD OF THE INVENTION

- 5 The present invention relates to alignment of liquid crystals in liquid crystal devices.

BACKGROUND OF THE INVENTION

- 10 Liquid crystal (LC) materials are rod-like or lath-like molecules which have different optical properties along their long and short axes. The molecules exhibit some long range order so that locally they tend to adopt similar orientations to their neighbours. The local
15 orientation of the long axes of the molecules is referred to as the "director". There are three types of LC materials: nematic, cholesteric (chiral nematic), and smectic. For a liquid crystal to be used in a display device, it must typically be made to align in a defined
20 manner in the "off" state and in a different defined manner in the "on" state, so that the display has different optical properties in each state. Two principal alignments are homeotropic (where the director is substantially perpendicular to the plane of the cell
25 walls) and planar (where the director is inclined substantially parallel to the plane of the cell walls). In practice, planar alignments may be tilted with respect to the plane of a cell wall, and this tilt can be useful in aiding switching. The present invention is concerned
30 with alignment in liquid crystal displays.

Hybrid Aligned Nematic (HAN), Vertical Aligned Nematic (VAN), Twisted nematic (TN) and super-twisted nematic (STN) cells are widely used as display devices in

- 2 -

consumer and other products. The cells comprise a pair of opposed, spaced-apart cell walls with nematic liquid crystal material between them. The walls have transparent electrode patterns that define pixels
5 between them.

In TN and STN displays, the inner surface of each wall is treated to produce a planar unidirectional alignment of the nematic director, with the alignment directions
10 being at 90° to each other. This arrangement causes the nematic director to describe a quarter helix within the TN cell, so that polarised light is guided through 90° when a pixel is in the "field off" state. In an
15 STN cell, the nematic liquid crystal is doped with a chiral additive to produce a helix of shorter pitch which rotates the plane of polarisation in the "field off" state. The "field off" state may be either white or black, depending on whether the cell is viewed through crossed or parallel polarisers. Applying a
20 voltage across a pixel causes the nematic director to align normal to the walls in a homeotropic orientation, so that the plane of polarised light is not rotated in the "field on" state.

25 In a HAN cell, one wall is treated to align a nematic LC in a homeotropic alignment and the other wall is treated to induce a planar alignment, typically with some tilt to facilitate switching. The LC has positive dielectric anisotropy, and application of an electric
30 field causes the LC directors to align normal to the walls so that the cell switches from a birefringent "field off" state to a non-birefringent "field on" state.

30001064 EPV1
March 22, 2000

- 3 -

In the VAN mode, a nematic LC of negative dielectric anisotropy is homeotropically aligned in the "field off" state, and becomes birefringent in the "field on" state. A dichroic dye may be used to enhance contrast.

5

Liquid crystal (LC) planar alignment is typically effected by the unidirectional rubbing of a thin polyimide alignment layer on the interior of the LC cell, which gives rise to a unidirectional alignment with a small pretilt angle. It has been proposed to increase the pretilt angle for a rubbed surface by incorporating small projections in the rubbed alignment layer, in "Pretilt angle control of liquid-crystal alignment by using projections on substrate surfaces for dual-domain TN-LCD" T. Yamamoto et al, J. SID, 4/2, 1996.

Whilst having a desirable effect on the optical characteristics of the device, the rubbing process is not ideal as this requires many process steps, and high tolerance control of the rubbing parameters is needed to give uniform display substrates. Moreover, rubbing may cause static and mechanical damage of active matrix elements which sit under the alignment layer. Rubbing also produces dust, which is detrimental to display manufacture.

Photoalignment techniques have recently been introduced whereby exposure of certain polymer coating to polarised UV light can induce planar alignment. This avoids some of the problems with rubbing, but the coatings are sensitive to LC materials, and typically produce only low pre-tilt angles.

30001064 EPV1
March 22, 2000

- 4 -

- An alternative is to use patterned oblique evaporation of silicon oxide (SiO) to form the alignment layer. This also effects a desired optical response; however the process is complicated by the addition of vacuum deposition and a lithography process. Moreover, control of process parameters for SiO evaporation is critical to give uniformity, which is typically difficult to achieve over large areas.
- 10 A useful summary of methods of aligning liquid crystals is given in "Alignment of Nematic Liquid Crystals and Their Mixtures", J. Cognard, Mol. Cryst. Liq. Cryst. 1-78 (1982) Supplement 1.
- 15 The use of surface microstructures to align LCs has been known for many years, for example as described in "The Alignment of Liquid Crystals by Grooved Surfaces" D. W. Berriman, Mol. Cryst. Liq. Cryst. 23 215-231 1973.
- 20 It is believed that the mechanism of planar alignment involves the LC molecules aligning along the grooves to minimise distortion energy derived from deforming the LC material. Such grooves may be provided by a monograting formed in a photoresist or other suitable material.
- 25
- It has been proposed in GB 2 286 467 to provide a sinusoidal bigrating on at least one cell wall, by exposing a photopolymer to an interference pattern of light generated by a laser. The bigrating permits the LC molecules to lie in two different planar angular directions, for example 45° or 90° apart. An asymmetric bigrating structure can cause tilt in one or
- 30

30001064 EPV1
March 22, 2000

- 5 -

both angular directions. Other examples of alignment by gratings are described in WO 96/24880, WO 97/14990 WO 99/34251, and "The liquid crystal alignment properties of photolithographic gratings", J. Cheng and
5 G. D. Boyd, *Appl. Phys. Lett.* **35**(6) 15 September 1979.

In "Mechanically Bistable Liquid-Crystal Display Structures", R. N. Thurston et al, *IEEE trans. on Electron Devices*, Vol. ED-27 No 11, November 1980, LC
10 planar alignment by a periodic array of square structures is theorised.

LC homeotropic alignment is also a difficult process to control, typically using a chemical treatment of the surface, such as lecithin or a chrome complex. These
15 chemical treatments may not be stable over time, and may not adhere very uniformly to the surface to be treated. Homeotropic alignment has been achieved by the use of special polyimide resins (Japan Synthetic Rubber Co). These polyimides need high temperature
20 curing which may not be desirable for low glass transition plastic substrates. Inorganic oxide layers may induce homeotropic alignment if deposited at suitable angles. This requires vacuum processes which are subject to the problems discussed above in relation
25 to planar alignment. Another possibility for producing homeotropic alignment is to use a low surface energy material such as PTFE. However, PTFE gives only weak control of alignment angle and may be difficult to process.

30

It is desirable to have a more controllable and manufacturable alignment for LC devices.

SUMMARY OF THE INVENTION

30001064 EPV1
March 22, 2000

- 6 -

- According to an aspect of the present invention there is provided a liquid crystal device comprising a first cell wall and a second cell wall enclosing a layer of liquid crystal material;
- 5 electrodes for applying an electric field across at least some of the liquid crystal material;
- a surface alignment structure on the inner surface of at least the first cell wall providing alignment to the liquid crystal molecules, wherein the said surface alignment structure comprises a random or pseudorandom array of features which are shaped and/or orientated to produce the desired alignment.
- 10
- 15 We have surprisingly found that the orientation of the director is induced by the geometry of the features, rather than by the array or lattice on which they are arranged.
- 20 Because the features are arranged in a random or pseudorandom array instead of a regular lattice, diffraction colours which result from the use of regular grating structures are reduced and may be substantially eliminated. Such an array can act as a
- 25 diffuser, which may remove the need for an external diffuser in some displays. Of course, if a diffraction colour is desired in the display, the array may be made less random, and the posts may be spaced at intervals which produce the desired interference effect. Thus,
- 30 the structure may be separately optimised to give the required alignment and also to mitigate or enhance the optical effect that results from a textured surface.

Using a random or pseudorandom array also mitigates optical and LC alignment effects that arise as a result

35

30001064 EPV1
March 22, 2000

7 -

of variations of phasing between regular arrays on two surfaces, for example Moire effects.

5 The desired alignment features are produced without rubbing or evaporation of inorganic oxides, and hence without the problems associated with such production methods.

10 In a preferred embodiment, the features comprise a plurality of upstanding posts. The features could also comprise mounds, pyramids, domes, walls and other promontories which are shaped and/or orientated to permit the LC director to adopt a desired alignment for a particular display mode. Where the features are
15 walls, they may be straight (eg, a monograting), bent (eg, L-shaped or chevron-shaped) or curved (eg, circular walls). The invention will be described for convenience hereinafter with respect to posts; however it is to be understood that the invention is not
20 limited to this embodiment. The posts may have substantially straight sides, either normal or tilted with respect to the major planes of the device, or the posts may have curved or irregular surface shape or configuration. For example, the cross section of the
25 posts may be triangular, square, circular, elliptical or polygonal.

The term "azimuthal direction" is used herein as follows. Let the walls of a cell lie in the x,y plane,
30 so that the normal to the cell walls is the z axis. Two tilt angles in the same azimuthal direction means two different director orientations in the same x,z plane, where x is taken as the projection of the director onto the x,y plane.

35

30001064 EPV1
March 22, 2000

- 8 -

The director tends to align locally in an orientation which depends on the specific shape of the post. For an array of square posts, the director may align along either of the two diagonals of the posts. If another shape is chosen, then there may be more than two azimuthal directions, or just one. For example an equilateral triangular post can induce three directions substantially along the angle bisectors. An oval or diamond shape, with one axis longer than the others, may induce a single local director orientation which defines the azimuthal direction. It will be appreciated that such an orientation can be induced by a very wide range of post shapes. Moreover, by tilting a square post along one of its diagonals it is possible to favour one direction over another. Similarly, tilting of a cylindrical post can induce an alignment in the tilt direction.

Shorter and wider posts tend to induce a planar alignment, whilst taller and thinner posts tend to induce a homeotropic alignment. Posts of intermediate height and width can induce tilted alignments and may give rise to bistable alignments in which the director may adopt either of two tilt angles in substantially the same azimuthal direction. By providing posts of suitable dimensions and spacing, a wide range of alignment directions, planar, tilted and homeotropic, can easily be achieved, and the invention may therefore be used in any desired LC display mode.

The posts may be formed by any suitable means; for example by photolithography, embossing, casting, injection moulding, or transfer from a carrier layer. Embossing into a plastics material is particularly preferred because this permits the posts to be formed

30001064 EPV1
March 22, 2000

9 -

simply and at low cost. Suitable plastics materials will be well known to those skilled the art, for example poly(methyl methacrylate).

- 5 By providing a plurality of upstanding tall or thin posts on at least the first cell wall, the liquid crystal molecules can be induced to adopt a state in which the director is substantially parallel to the plane of the local surface of the posts, and normal to
10 the plane of the cell walls.

- If the posts are perpendicular to the cell walls, the LC may be homeotropically aligned at substantially 90° to the plane of the cell walls. However, for some
15 applications it is desirable to achieve a homeotropic alignment which is tilted by a few degrees. This may readily be achieved by using posts which are inclined from the perpendicular. As the posts are inclined more, the average LC tilt angle away from the normal
20 will increase. The invention therefore provides a simple way of inducing LC homeotropic alignment with any preferred tilt angle.

- When exposing a photoresist, a desired post tilt angle
25 can readily be achieved by exposing the photoresist through a suitable mask with a light source at an angle related to the desired angle by Snell's law as is known to allow for the refractive index of the photoresist material.

- 30 The preferred height for the posts will depend on factors such as the cell thickness, the thickness and number of the posts, and the LC material. For homeotropic alignment, the posts preferably have a
35 vertical height which is at least equal to the average

30001064 EPV1
March 22, 2000

- 10 -

post spacing. Some or all of the posts may span the entire cell, so that they also function as spacers.

- 5 It is preferred that one electrode structure (typically a transparent conductor such as indium tin oxide) is provided on the inner surface of each cell wall in known manner. For example, the first cell wall may be provided with a plurality of "row" electrodes and the second cell wall may be provided with a plurality of "column" electrodes. However, it would also be possible to provide planar (interdigitated) electrode structures on one wall only, preferably the first cell wall.
- 10
- 15 The inner surface of the second cell wall could have low surface energy so that it exhibits little or no tendency to cause any particular type of alignment, so that the alignment of the director is determined essentially by the features on the first cell wall.
- 20 However, it is preferred that the inner surface of the second cell wall is provided with a surface alignment to induce a desired alignment of the local director. This alignment may be homeotropic, planar or tilted. The alignment may be provided by an array of features of suitable shape and/or orientation, or by
- 25 conventional means, for example rubbing, photoalignment, a monograting, or by treating the surface of the wall with an agent to induce homeotropic alignment.
- 30 For planar and tilted alignments, the shape of the features is preferably such as to favour only one azimuthal director orientation adjacent the features. The orientation may be the same for each feature, or the
- 35 orientation may vary from feature to feature so as to

30001064 EPV1
March 22, 2000

- 11 -

give a scattering effect in one of the two states.

Alternatively, the shape of the features may be such as to give rise to a plurality of stable azimuthal director orientations. Such alignments may be useful in display modes such as bistable twisted nematic (BTN) modes. These azimuthal director orientations may be of substantially equal energy (for example vertical equilateral triangular posts will give three azimuthal alignment directions of equal energy) or one or more alignment directions may be of different energy so that although one or more lower energy alignments are favoured, at least one other stable azimuthal alignment is possible.

The liquid crystal device will typically be used as a display device, and will be provided with means for distinguishing between switched and unswitched states, for example polarisers or a dichroic dye.

The cell walls may be formed from a non-flexible material such as glass, or from rigid or flexible plastics materials which will be well known to those skilled in the art of LC display manufacture, for example poly ether sulphone (PES), poly ether ether ketone (PEEK), or poly(ethylene terephthalate) (PET).

For many displays, it is desirable to have a uniform alignment throughout the field of view. For such displays, the posts may all be of substantially the same shape, size, orientation and tilt angle. However, where variation in alignment is desired these factors, or any of them, may be varied to produced desired effects. For example, the posts may have different orientations in different regions where different

30001064 EPV1
March 22, 2000

12 -

alignment directions are desired. A TN cell with quartered sub-pixels is an example of a display mode which uses such different orientations, in that case to improve the viewing angle. Alternatively, if the heights of the posts are varied, the strengths of interactions with the LC will vary, and may provide a greyscale. Similarly, variation of the shape of the posts will vary the strength of interaction with the LC.

The features may optionally be provided on both walls to provide a desired local director alignment in the region of both walls. Different features may be provided on each wall, and the features may be independently varied in different regions of each wall depending on the desired alignment.

- 13 -

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be further described by way of example, with reference to the following drawings in
5 which:

Figure 1 is a schematic cross section, parallel to the cell walls, through a region around a post in a liquid crystal device in accordance with one
10 aspect of the present invention. The long axes of the ellipses represent typical orientations of the LC director;

Figure 2 is a schematic cross section,
15 perpendicular to the cell walls, through a part of a device in accordance with another aspect of the present invention along a diagonal of a post;

Figure 3 is a cross section, perpendicular to the cell walls, parallel and near to a side of a post of a bistable nematic device in accordance with a
20 further aspect of the invention;

Figure 4 is a plan view of a unit cell of a device in accordance with the present invention, having
25 posts in a pseudorandom array; and

Figure 5 is a cross section, perpendicular to the cell walls, parallel and near to a side of a post of a device in accordance with a further aspect of
30 the invention;

Figures 6 and 7 are schematic cross sectional views similar to Figure 1 for, respectively, a
35 post of elliptical cross section and a post of

30001064 EPV1
March 22, 2000

14 -

triangular cross section; and

Figures 8 to 12 are views of different arrays of features of devices in accordance with further embodiments of the invention.

DETAILED DESCRIPTION

10 The liquid crystal cell shown schematically in Figure 2 comprises a first cell wall 2 and a second cell wall 4 which enclose a layer of nematic LC material of negative dielectric anisotropy. The molecules of the LC are represented as ellipses, with the long axis indicating the local director. The inner surface of each cell wall is provided with a transparent electrode pattern, for example row electrodes 12 on the first cell wall 2 and column electrodes 14 on the second cell wall 4, in a known manner. The LC alignment is bistable.

20 The inner surface of the first cell wall 2 is textured with an array of square posts 10, and the inner surface of the second cell wall 4 is flat. The posts are in a pseudorandom array, as will be described below with reference to Figure 4. The posts 10 are approximately 1 μm high and the cell gap is typically 3 μm . The flat surface is treated to give homeotropic alignment. The posts are not homeotropically treated.

30 Such an array of square posts has two preferred orientations of the LC director in the azimuthal direction. These are along the two diagonals of the post. Figure 1 shows a cross-section through a post with the LC distorted around it, from one corner to the diagonally opposite one. This alignment around the post

30001064 EPV1
March 22, 2000

- 15 -

then tends to seed the alignment of the LC above the post such that the average orientation is also along that diagonal.

5 By tilting the posts along one of the diagonals (Figure 2) it is possible to favour that alignment direction. Through computer simulation of this geometry we found that although there is only one azimuthal alignment direction there are in fact two states with similar
10 energies but which differ in how much the LC tilts. Figure 2 is a schematic of the two states. In one state (shown on the left of Figure 2) the LC is highly tilted, and in the other it is planar around the posts. The exact nature of the LC orientation depends on the
15 details of the structure, but for a range of parameters there are two distinct states with different tilts. The two states may be distinguished by viewing through a polariser 8 and an analyser 6. The low tilt state has high birefringence and the high tilt state has low
20 birefringence.

Without limiting the scope of the invention in any way, we think that the two states may arise because of the way in which the LC is deformed by the post. Flowing
25 around a post causes regions of high energy density at the leading and trailing edges of the post where there is a sharp change in direction. This can be seen in Figure 1 at the bottom left and top right corners of the post. This energy density is reduced if the LC
30 molecules are tilted because there is a less severe direction change. This is clear in the limit of the molecules being homeotropic throughout the cell. In that case there is no region of high distortion at the post edges. In the higher tilt state this deformation
35 energy is therefore reduced, but at the expense of a

30001064 EPV1
March 22, 2000

- 16 -

higher bend/splay deformation energy at the base of the posts. The LC in contact with the flat surface between posts is untilted but undergoes a sharp change of direction as it adopts the tilt around the post.

- 5 In the low tilt state the energy is balanced in the opposite sense, with the high deformation around the leading and trailing edges of the post being partially balanced by the lack of the bend/splay deformation at the base of the post because the tilt is uniform around
10 the post. Our computer simulations suggest that, for the current configuration, the higher tilt state is the lower energy state.

- This is supported by the results of computer simulation and in actual cells. When viewed at an appropriate angle
15 between crossed polarisers the cells always cool into the darker of the two states. From Figure 2 it would appear that the high tilt state will have lower birefringence and therefore appear darker than the low tilt state. The exact amount of tilt in the high tilt
20 state will be a function of the elastic constants of the LC material and the planar anchoring energy of the post material.

- The posts may be formed using hard contact mask
25 exposure of a photoresist layer on a glass substrate as will described below. By way of example, the posts may be $0.7 \times 0.7 \mu\text{m}$ across and typically up to $1.5 \mu\text{m}$ high.

- Figure 4 shows a unit cell of a pseudorandom array of
30 posts. Each square post is about $0.8 \times 0.8 \mu\text{m}$, and the pseudorandom array has a repeat distance of $56 \mu\text{m}$. The positions of the posts are effectively randomised, but the orientation of the posts is kept fixed. In this case, there is no regular lattice to align the LC so

30001064 EPV1
March 22, 2000

- 17 -

that any alignment must be due to the posts. We find experimentally for a HAN cell with LC material of positive dielectric anisotropy that the LC aligns along the post diagonal, just as for a regular array.

5

Referring now to Figure 3, there is shown a computer-generated model of LC alignment around a square post similar to that shown in Figure 2, but with the inner surface of the second cell wall treated to give planar alignment. In the state shown in the left in Figure 3, the local director is highly tilted, and in the other it is planar around the posts. As with the cell of Figure 2, switching between the two states is achieved by the application of suitable electrical signals.

15

We have done some computer simulation of the homeotropic alignment by posts. We have modelled 3 μm thick cells with an array of square posts which are 300 nm across on one substrate, with the other substrate flat, but modelled as a material that will give strong planar alignment. We have modelled a variety of post heights and spacings to see when the LC adopts a homeotropic alignment around the posts. Figure 5 shows a computer simulation side view of a region containing a single post about 1.8 μm tall on the bottom substrate. Around the post the LC is strongly tilted, whilst above the post the alignment is more planar, due to the interaction with the upper substrate.

30

In the computer simulations we have modelled the effect of varying the post height from 0.2 to 2.6 μm , with the gap between posts varying from 0.6 to 1.2 μm . As post height is increased, the alignment goes from being just planar to being bistable or multistable between the

35

30001064 EPV1
March 22, 2000

- 18 -

planar state and a more tilted state. As post height is increased further, then the planar state becomes too high in energy and there is just the highly tilted homeotropic state. Present studies indicate that

5 homeotropic alignment begins when the post height is approximately equal to the average post spacing. The effect is expected to persist down to very small cross-section posts. An expected upper limit of the post

10 cross-section for homeotropic alignment is when the post width is of the order of the cell gap.

Referring now to Figures 6 and 7, there are shown examples of different post shapes which produce LC alignment when in a random or pseudorandom array. The

15 post shown in Figure 6 has an elliptical cross section, and the LC director aligns locally along the long axis of the ellipse. For the equilateral triangular post of Figure 7 there are three director alignments possible which are equal energy, each of which is parallel to a

20 line which bisects the triangle into equal halves. One such alignment is illustrated. By tilting the posts in the direction of one of the apices, that alignment direction can be favoured. Alternatively, elongating the triangle will cause one director orientation to be

25 favoured. For example, an isosceles triangle will favour a director alignment along the major axis of the triangle. In each case, depending on the height of the posts, the LC adopts a locally planar or tilted planar alignment. If the inner surface of the second cell

30 wall is treated to give local homeotropic alignment, application of an electric field will cause LC molecules of positive dielectric anisotropy to line up with the field in a homeotropic orientation. The cell

35 therefore functions in a HAN mode. By providing a different planar alignment on the second cell wall,

30001064 EPV1
March 22, 2000

- 19 -

which could also be posts, other display modes could also be used, for example TN or (with a chirally doped LC material) STN mode.

5 Figures 8 to 11 show perspective views of posts of devices in accordance with alternative embodiments of the invention. The posts are arranged in pseudorandom arrays. In Figure 8, elliptical posts are shown, with the long axes of the ellipses parallel. Depending on
10 their height, the posts produce either a uniform planar alignment, a bistable or multistable alignment (planar or tilted), or a homeotropic alignment (which may be tilted). In Figure 9, elliptical posts are randomly orientated, providing an alignment structure in which
15 there is no strongly preferred long range orientation of the nematic director. It is envisaged that this structure and others like it may be used with an LC material of positive dielectric anisotropy in a display with a scattering mode. Figure 10 illustrates an
20 arrangement of posts of a plurality of shapes and sizes which may be used to give controlled alignment in different areas, and different effects such as greyscale. Other arrangements and effects are of course possible. For example, the posts may be
25 different heights in different regions, as illustrated in Figure 12, which also shows different post sizes and orientations in a pseudorandom arrangement. The posts in Figure 11 are tilted at different angles in different regions of the display, thereby producing
30 different tilt angles in the LC alignment and the possibility of producing a greyscale, for example in a HAN mode. In a HAN display mode, varying the post height will give a variation in the switching performance.

35

30001064 EPV1
March 22, 2000

Cell Manufacture

A typical process is described below, by way of non-limiting example. A clean glass substrate 2 coated with Indium Tin Oxide (ITO) is taken and electrode patterns 12 are formed using conventional lithographic and wet etch procedures. The substrate is spin-coated with a suitable photoresist (Shipley S1813) to a final thickness of 1.3 μm .

10 A photomask (Compugraphics International PLC) with an array of suitably-dimensioned opaque regions, for example in unit cells corresponding to Figure 4, is brought into hard contact with the substrate and a suitable UV source is used to expose the photoresist for 10 s at $\sim 100 \text{ mW/cm}^2$. The substrate is developed using Microposit Developer diluted 1:1 with deionised water for 20 s and rinsed dry. The substrate is flood exposed using a 365 nm UV source for 3 minutes at 30 mW/cm^2 , and hardbaked at 85°C for 12 hours. The substrate is then deep UV cured using a 254 nm UV source at $\sim 50 \text{ mW/cm}^2$ for 1 hour. By exposing through the mask using a UV source at an offset angle to the normal to the plane of the cell wall, tilted posts may be produced. The tilt angle (or blaze angle) is related to the offset angle by Snell's law. The posts may have somewhat rounded edges and are not necessarily overhung. The precise shape is dependent on processing parameters as is well known and understood in the art of photolithography of fine features.

A second clean ITO substrate 4 with electrode patterns 14 is taken and treated to give a homeotropic alignment of the liquid crystal using a stearyl-carboxy-chromium


- 21 -

complex, in a known manner.

An LC test cell is formed by bringing the substrates together using suitable spacer beads (Micropearl) contained in UV curing glue (Norland Optical Adhesives N73) around the periphery of the substrates 2, 4, and cured using 365 nm UV source. The cell is capillary filled with a nematic liquid crystal mixture of positive dielectric anisotropy, for example ZLI 2293 (Merck). It is known that switching in conventional LC devices can be improved by addition of surfactant oligomers to the LC. See, for example, G P Bryan-Brown, E L Wood and I C Sage, Nature Vol. 399 p338 1999. A surfactant may optionally dissolved in the LC material. Methods of spacing, assembling and filling LC cells are well known to those skilled in the art of LCD manufacture, and such conventional methods may also be used in the spacing, assembling and filling of devices in accordance with the present invention.

20

30001064 EPV1
March 22, 2000



- 22 -

CLAIMS

1. A liquid crystal device comprising a first cell wall (2) and a second cell wall (4) enclosing a layer of liquid crystal material; electrodes (12, 14) for applying an electric field across at least some of the liquid crystal material; a surface alignment structure on the inner surface of at least the first cell wall (2) providing a desired alignment to the liquid crystal molecules, wherein the said surface alignment structure comprises a random or pseudorandom array of features (10) which are shaped and/or orientated to produce the desired alignment.
2. A device as claimed in claim 1, wherein the geometry and spacing of the features (10) is such as to cause the liquid crystal material to adopt a locally planar or tilted planar alignment.
3. A device as claimed in claim 2, wherein the inner surface of the second cell wall (4) is treated to produce a locally homeotropic alignment of the liquid crystal material, whereby the cell functions in a hybrid aligned nematic mode.
4. A device as claimed in claim 2, wherein the inner surface of the second cell wall (4) is treated to produce a locally planar or tilted planar alignment of the liquid crystal material substantially at right angles to the alignment direction on the first cell wall, whereby the cell functions in a TN or STN mode.
5. A device as claimed in claim 1, wherein the geometry and spacing of the features (10) is such as to cause the liquid crystal material to adopt a locally

30001064 EPV1
March 22, 2000

- 23 -

homeotropic alignment.

6. A device as claimed in claim 1, wherein the features are shaped and/or orientated so as to produce a substantially uniform planar or tilted planar alignment of the liquid crystal director in a single azimuthal direction.
7. A device as claimed in claim 1, wherein the features are shaped and/or orientated so as to produce a substantially uniform planar or tilted planar alignment of the liquid crystal director in a plurality of azimuthal directions.
8. A device as claimed in claim 1, wherein the features (10) comprise posts which are tilted with respect to the normal to the plane of the first cell wall (2).
9. A device as claimed in claim 1, further including an analyser (6) and a polariser (8) mounted on the cell walls (2, 4).
10. A device as claimed in claim 1, wherein the features (10) are of different height, different shape, different tilt and/or different orientation in different regions of the device.
11. A device as claimed in claim 1, wherein tilt angle and orientation of the posts are uniform throughout the device.
12. A cell wall for use in manufacturing a liquid crystal device according to claim 1, comprising a wall (2) and an alignment surface microstructure on one

30001064 EPV1
March 22, 2000

- 24 -

surface thereof for aligning the director of a liquid crystal material, the said microstructure comprising a random or pseudorandom array of features (10) which are shaped and/or orientated to produce the desired


5 alignment.

13. A method of manufacturing a cell wall in accordance with claim 12, comprising applying a photoresist material to a surface of a wall (2), exposing the
10 applied photoresist material to a suitable light source through a mask which has a random or pseudorandom pattern, removing unexposed photoresist, and hardening the exposed photoresist material to produce a random or pseudorandom array of alignment features (10) on the
15 wall (2).

14. A method of manufacturing a cell wall in accordance with claim 12, comprising applying a plastics material to the surface of a wall (2), and embossing a random or
20 pseudorandom array of alignment features into the plastics material.

15. A method of manufacturing a liquid crystal device in accordance with claim 1, comprising securing a first
25 cell wall (2) in accordance with claim 11 to a second cell wall (4), at least one of the cell walls (2, 4) having an electrode structure (14) thereon, so as to produce a cell having spaced apart cell walls (2, 4) the inner surfaces of which each carry at least one
30 electrode structure (12, 14); filling the cell with a liquid crystal material, and sealing the cell.

30001064 EPV1
March 22, 2000




- 25 -

ABSTRACT

LIQUID CRYSTAL ALIGNMENT

5 A liquid crystal device has a surface alignment
structure comprising a random or pseudorandom array of
alignment features (10) which are shaped and/or
orientated to produce a desired alignment. Depending
on the geometry and spacing of the features (10), the
10 liquid crystal may be induced to adopt a planar,
tilted, or homeotropic alignment.

30001064 EPV1
March 22, 2000



1/6

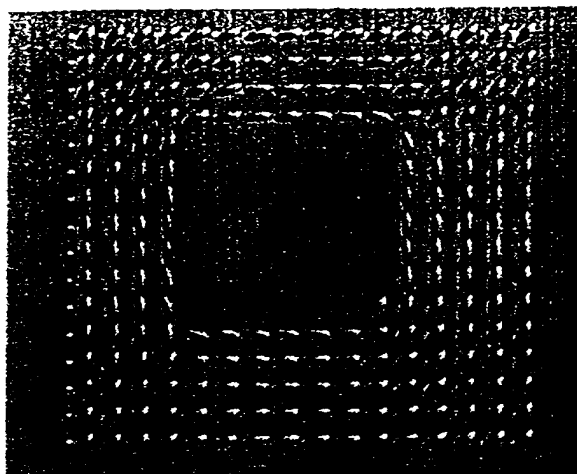


FIG. 1

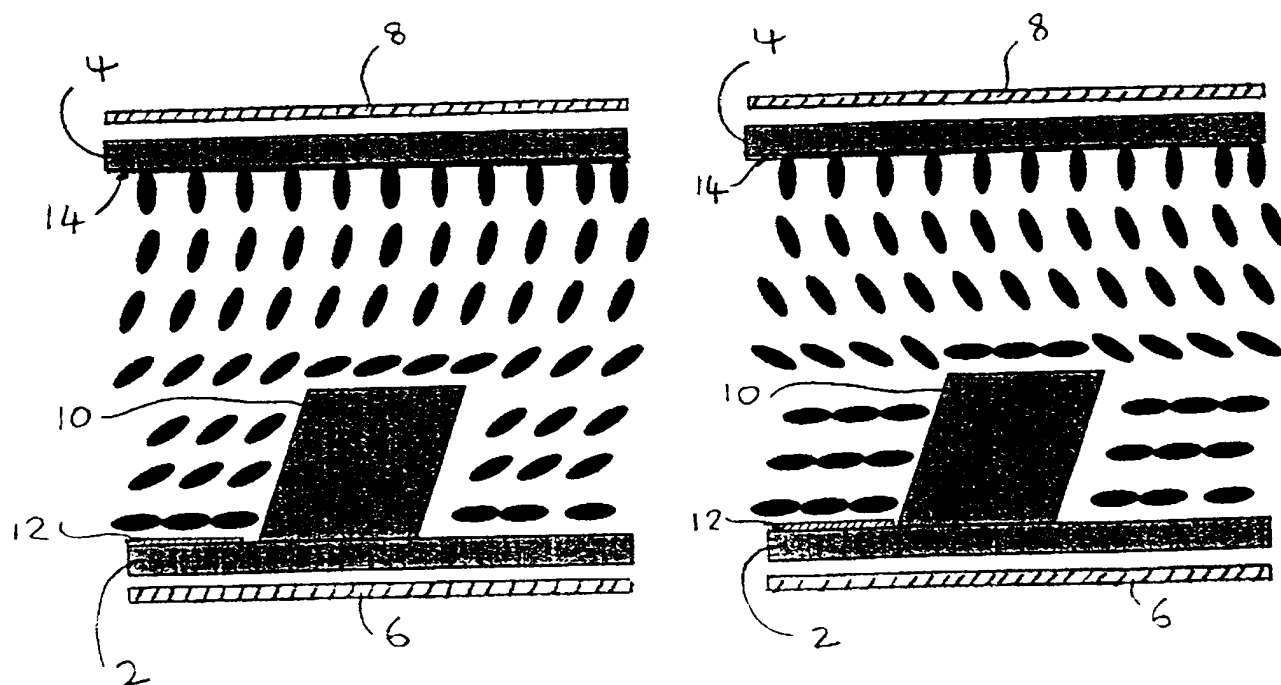


FIG. 2

2/6

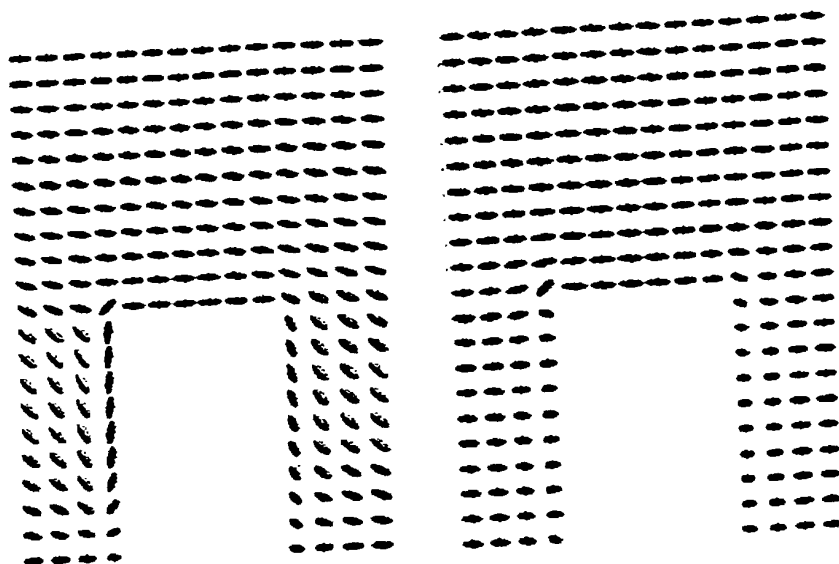


FIG. 3

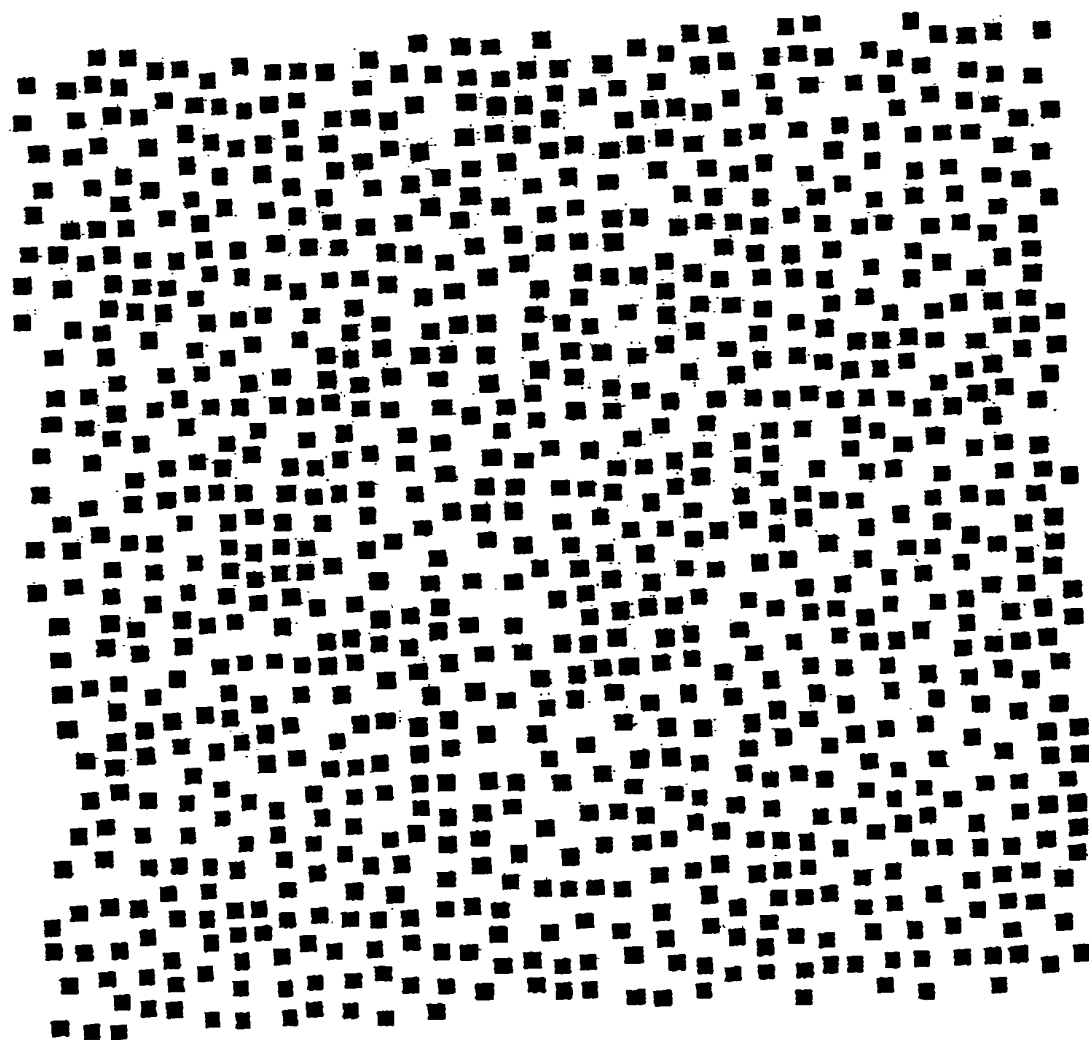


FIG. 4

3/6

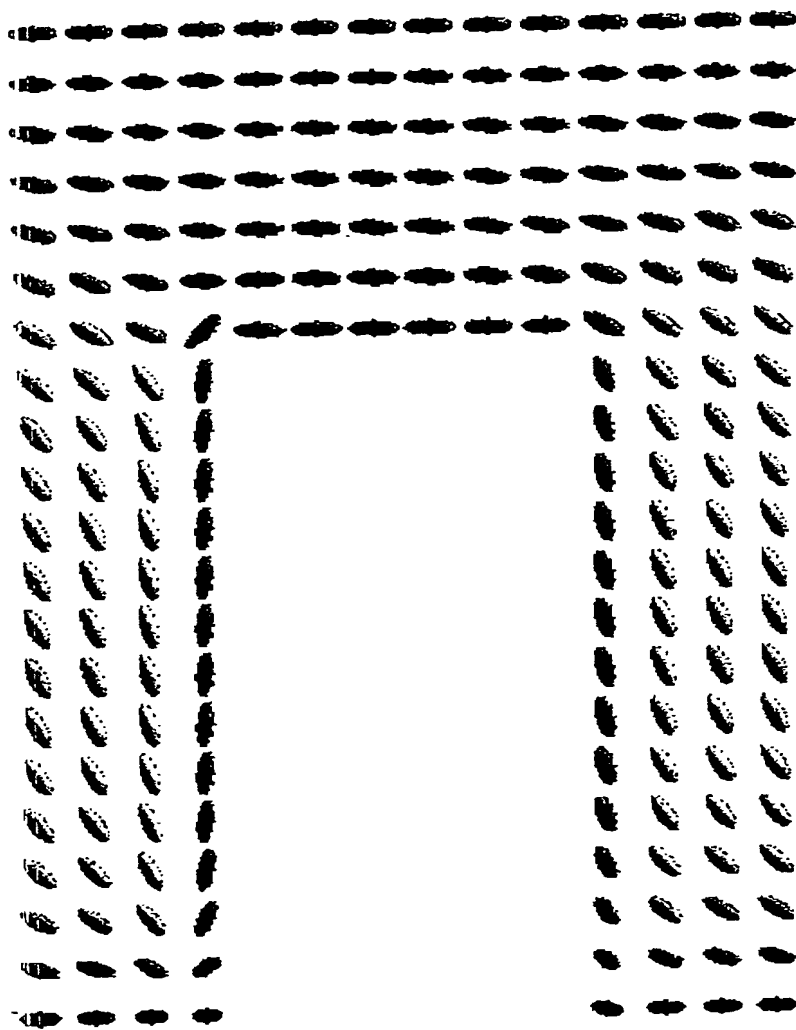


FIG. 5

4/6

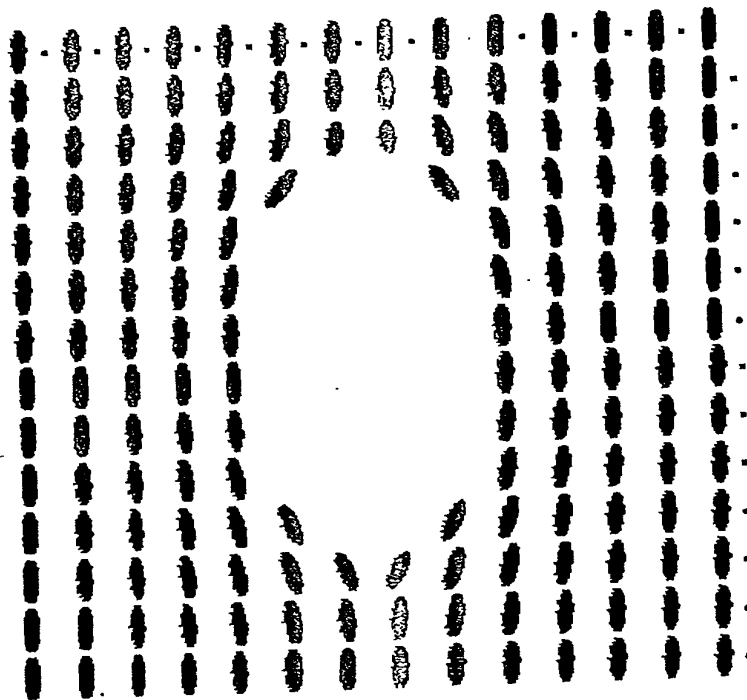


FIG. 6

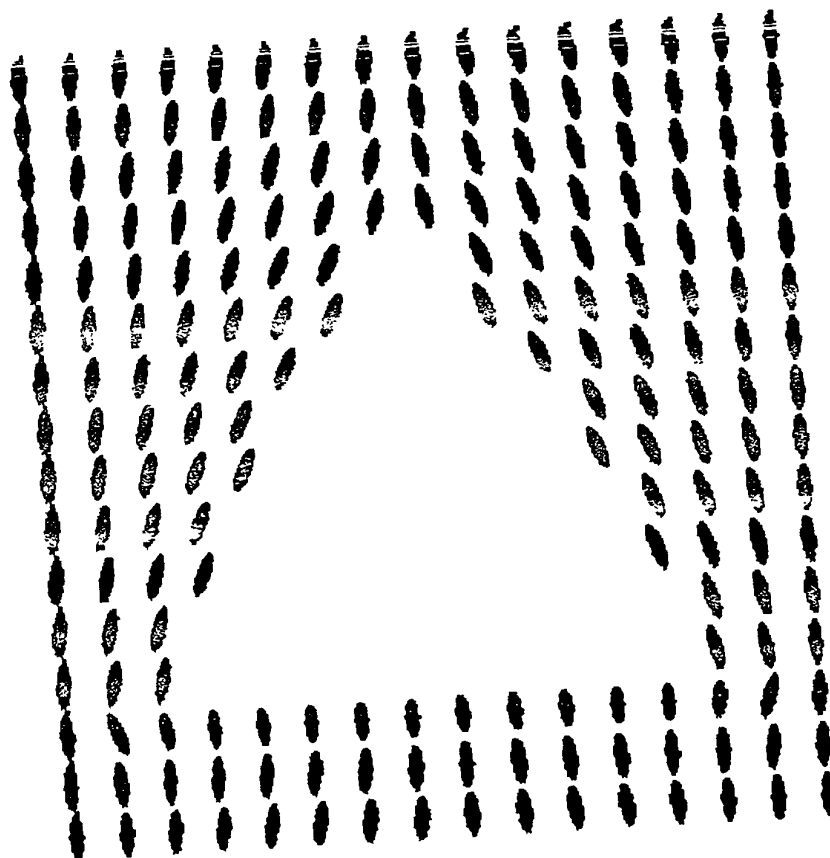


FIG. 7

5/6

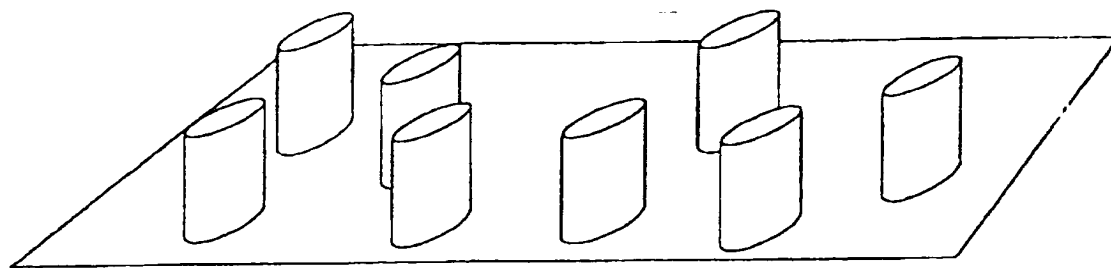


FIG. 8

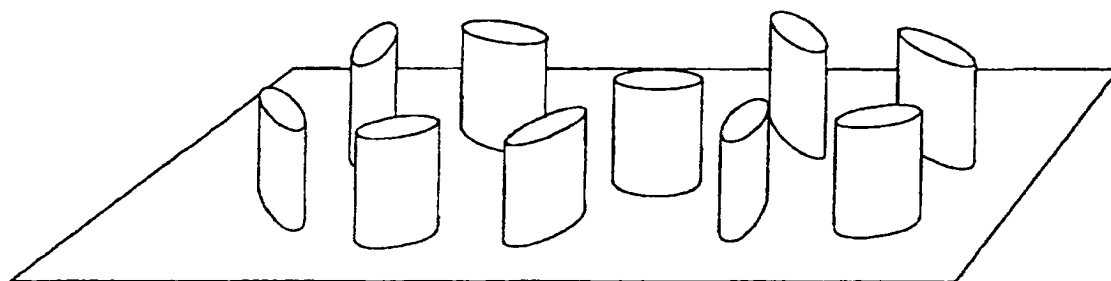


FIG. 9

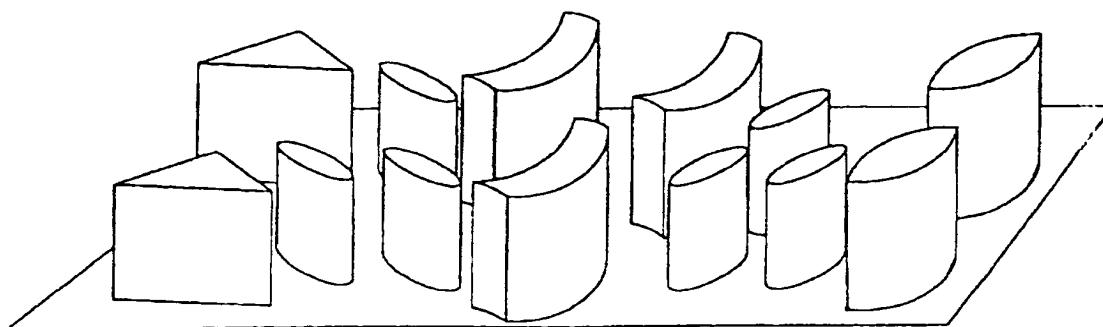


FIG. 10

6/6

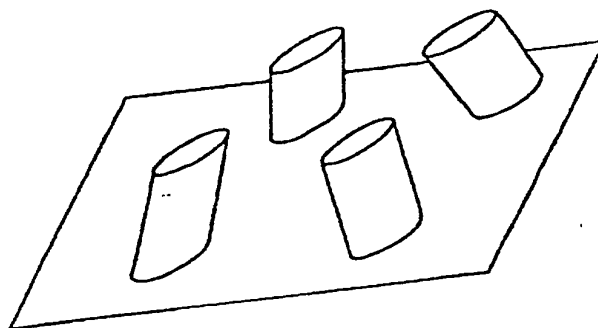


FIG. 11

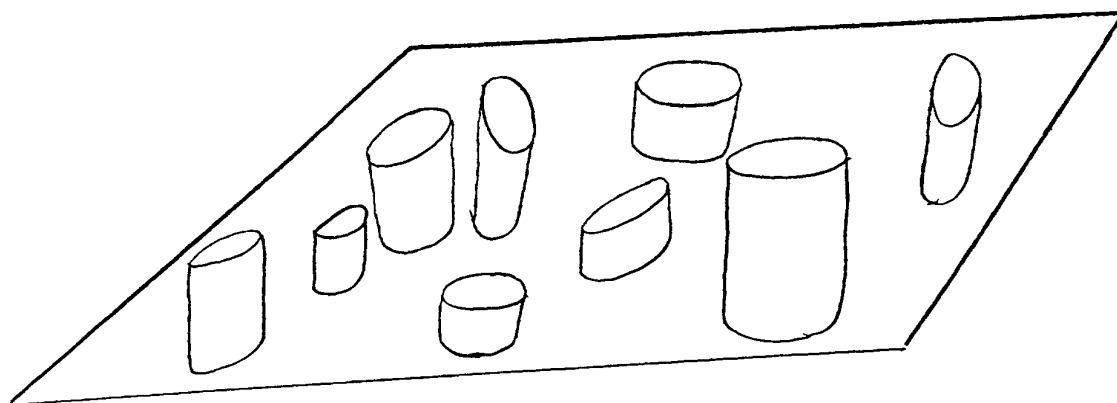


FIG. 12